


KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | K.12.JB.52.000N23

Hanot | Itsulkeutuvat hanat

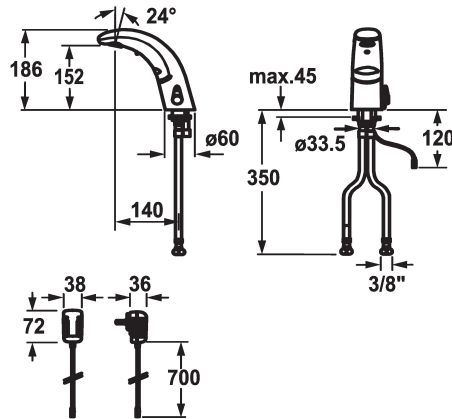

KWC-No.

119599

chromeline, A 140, flexible connection hoses, without pop-up valve, mains receiver, Basic, with mixing

119601

chromeline, A 140, flexible connection hoses, without pop-up valve, battery, Basic, with mixing

* Automatic controled

- Dual infrared sensor A10

* With mixing

- temperature limiter adjustable

* EcoProtect - water-saving device

* Basic: counter-sunk iqua-click

* Microprocessor-control

- flow time adjustable (1 second factory setting)

- short time off (cleaning) activatable

- continuous water flow (filling) activatable

- sensor sensitivity adjustable permanent, automatic self-calibration

- 12- or 24-hour-hygiene flushing activatable

* Fixed spout

- Neoperl® Cascade®

* OptimalSpace - ample space for washing or working

* Electrovalve

* Flexible connection hoses 3/8"

* Fastening by means of stud bolt M8 x 1

* Mounting hole size 63.5 mm

* Scope of delivery:

- Mains receiver 100-240 V / operating voltage 6 V

3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

Tekniset tiedot

A_Spout_Spray

ATT-KWC-ABLAUFGARNITUR

ATT-KWC-EL_STEUERUNG

Connection

Spout

ATT-KWC-IQUA_CLICK

ATT-KWC-STROMVERSORGUNG

Värikoodi

Installation_type

Faucet_typ

Measure_Height

G_Acoustic group

Projection_A

EnergyLabelCH

ATT-KWC-MASS-WASSERAUSTRITT

Materiali

IviCode

5 l/min (3 bar)

ohne_Ablaufgarnitur

berührungslos

Flexible_Anschlusschläuche

Kiinnitetty

Basic, mit Mischung

Netz AP

chromeline

Standmontage

Elektronik

186

I

A140

A

152

Messinki

0

