


KWC KIO
Kitchen - with LED-technology

Modell-Linie: KIO | 10.481.232.000FL
Umyvadlové armatury | Elektronické armatury

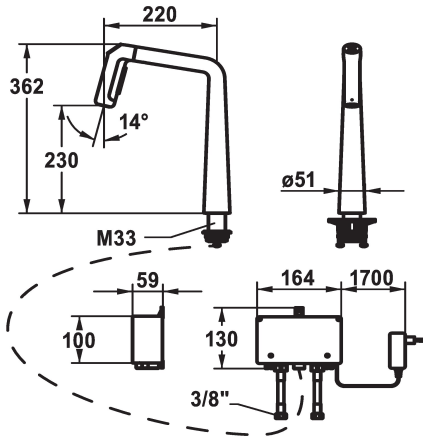

KWC-No.

- 125193**
chromeline, A 220, flexible connection hoses, mains receiver
- 125194**
matt black, A 220, flexible connection hoses, mains receiver
- 125195**
decor steel, A 220, flexible connection hoses, mains receiver

- * IntelligentControl - electronic control
- * gap between wall and centre of mounting hole min. 26 mm
- * TouchProtect - anti-scald protection thanks to the "double skin" principle
- * Microprocessor-control
 - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
- * Pull-out spray
 - ergonomic spout alignment, shape and handling
 - SprayClean - easy to clean and actively prevents limescale buildup
 - Neoperl® Perlator® laminar
 - PowerClean - needle spray mode, with automatic diverter reset
- Integrated control unit

ATT-KWC-FARBCODE


- chromeline
- matt black
- decor steel

- up to 500 mm pull-out length
- hose surface to fit faucet surface
- * Hose guide, swivelling 150°, can be extended to 360°
- * EasyLock - a pull-out spray that easily slides back into place
- * OptimalSpace - ample space for washing or working
- * KWC control unit, maintenance-free
- up-to-date microprocessor and drive technology
- tried-and-tested valve technology
- with-out installation materials
- designed for wired connection to 1 operating unit (standard)
- * Flexible connection hoses 3/8"
- * QuickInstallation - Fastening via threaded connection with locking screws
- * Mounting hole size ø35 mm
- * Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 12 V / cable length 2000 mm
 - * To be ordered separately (optional or if necessary):
 - Swivel range limited to 120°, Z.538.320

Technické údaje

A_Spout_Spray
ATT-KWC-EL_STEUERUNG
ATT-KWC-LICHT
Connection
ATT-KWC-AUSLAUF
ATT-KWC-STROMVERSORGUNG
Handling
Kitchen_spray
ATT-KWC-FARBCODE
Installation_type
Faucet_typ
ATT-KWC-BAUFORM
Measure_Height
G_Acoustic group

10 l/min (3 bar)
berührungsarm
mit LED-Technologie
Flexible_Anschlussschläuche
schwenkbar
Netz AP
frontbedient
Auszugbrause
chromeline
Standmontage
Hebelmischer
L-Auslauf
362
I





KWC KIO
Kitchen - with LED-technology

Modell-Linie: KIO | 10.481.232.000FL
Umyvadlové armatury | Elektronické armatury

Projection_A	A220
EnergyLabelCH	B
ATT-KWC-MASS-WASSERAUSTRITT	230
Materiál	mosaz

Náhradní díly



Wrench to KIO pull-out spray

538810
Z.538.810
