


KWC KIO  
Electronic faucet - kitchen - LED-technology

Modell-Linie: KIO | 10.481.232.000FL  
Taps | Electronic taps

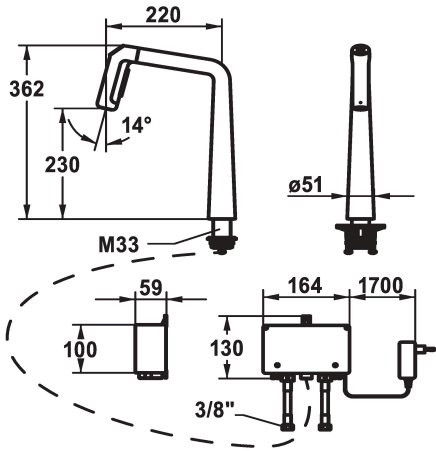

KWC-No.

- 125193**  
chromeline, A 220, flexible connection hoses, power supply unit
- 125194**  
matt black, A 220, flexible connection hoses, power supply unit
- 125195**  
decor steel, A 220, flexible connection hoses, power supply unit

Color\_code

- chrome
- matt black
- decor steel


- \* IntelligentControl - electronic control
- \* gap between wall and centre of mounting hole min. 26 mm
- \* TouchProtect - anti-scald protection thanks to the "double skin" principle
- \* Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
- \* Pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Perlator® laminar
  - PowerClean - needle spray mode, with automatic diverter reset
  - Integrated control unit

- up to 500 mm pull-out length
- hose surface to fit faucet surface
- \* Hose guide, swivelling 150°, can be extended to 360°
- \* EasyLock - a pull-out spray that easily slides back into place
- \* OptimalSpace - ample space for washing or working
- \* KWC control unit, maintenance-free
- up-to-date microprocessor and drive technology
- tried-and-tested valve technology
- with-out installation materials
- designed for wired connection to 1 operating unit (standard)
- \* Flexible connection hoses 3/8"
- \* QuickInstallation - Fastening via threaded connection with locking screws
- \* Mounting hole size ø35 mm
- \* Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 12 V / cable length 2000 mm
- \* To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320

Technical Data

A_Spout_Spray
Electronical_control
Light
Connection
Spout
Power_supply
Handling
Kitchen_spray
Color_code
Installation_type
Faucet_typ
Design
Measure_Height

10 l/min (3 bar)
Automatic, low-contact
with LED-Technologie
Flexible connection hoses
swivel
mains receiver
front lever
Pull-out spray
chrome
Pillar installation
Lever mixer
L-Spout
362





**KWC** KIO  
Electronic faucet - kitchen - LED-technology

**Modell-Linie: KIO | 10.481.232.000FL**  
Taps | Electronic taps

G_Acoustic group	I
Projection_A	A 220
EnergyLabelCH	B
Dimension Water outlet	230
material	Brass

**Spare Parts**



**Wrench to KIO pull-out spray**

**538810**  
Z.538.810