


## KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | 12.696.161.000

Hanot | Itsulkeutuvat hanot

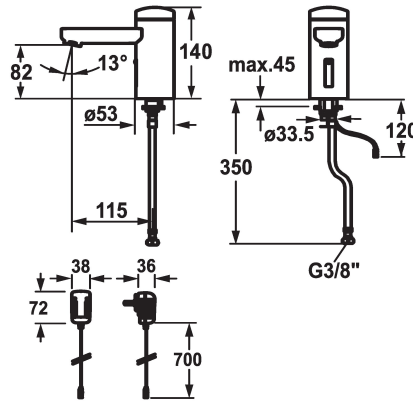

### KWC-No.

#### 125257

chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, without mixing

#### 125258

chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, without mixing

- \* Automatic controled design
- \* Infrared sensor L20
- \* Without mixing
- for cold or mixed water supply
- \* EcoProtect - water-saving device
- \* Basic: counter-sunk iqua-click
- \* Microprocessor-control
- flow time adjustable (1 second factory setting)
- short time off (cleaning) activatable
- continuous water flow (filling) activatable
- sensor sensitivity adjustable permanent, automatic self-calibration

### ATT-KWC-STROMVERSORGUNG

Akku

Netz AP

- 12- or 24-hour-hygiene flushing activatable
- \* Fixed spout
- Neoperl® Cascade®
- \* Electrovalve
- \* Flexible connection hose 3/8"
- \* Fastening by means of stud bolt M8 x 1
- \* Mounting hole size ø35 mm
- \* Scope of delivery:
- Mains receiver 100-240 V / operating voltage 6 V
- 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

### Tekniset tiedot

A_Spout_Spray
ATT-KWC-ABLAUFGARNITUR
ATT-KWC-EL_STEUERUNG
Connection
Spout
ATT-KWC-IQUA_CLICK
ATT-KWC-STROMVERSORGUNG
Värikoodi
Installation_type
Faucet_typ
Measure_Height
G_Acoustic_group
Projection_A
EnergyLabelCH
ATT-KWC-MASS-WASSERAUSTRITT
Materiaali
IviCode

6 l/min (3 bar)
ohne_Ablaufgarnitur
berührungslos
Flexibler_Anschluss Schlauch
Kiinnitetty
Basic, ohne Mischung
Netz AP
chromeline
Standmontage
Elektronik
140
I
A115
A
82
Messinki
0

