


KWC IQUA
Thermostatic mixer - Automatic, non-contact - Basin

Modell-Linie: IQUA | 11.692.083.000
Ventily | Termostatické směšovací ventily

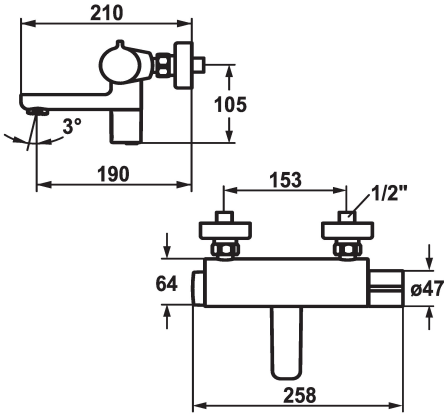

KWC-No.

125261
chromeline, AD 153, A 200, battery

125323
chromeline, AD 153, A 200, without wall connections, battery

- * Automatic controled design
- * Infrared sensor thermostatico W35
- * SkinProtect - Safety stop prevents scalding
- * Microprocessor-control
- flow time adjustable (1 second factory setting)
- short time off (cleaning) activatable
- continuous water flow (filling) activatable
- sensor sensitivity adjustable permanent, automatic self-calibration
- 12- or 24-hour-hygiene flushing activatable

- * Fixed spout
- Neoperl® Cascade®
- * Electrovalve
- * Wall connections 1/2" x 1/2", with shut-off valve L 40
- * Scope of delivery:
- Battery 6 V Lithium CRP2
- lifespan at 100 circuits/day: 4 years
- 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

Technické údaje

A_Spout_Spray
ATT-KWC-EL_STEUERUNG
ATT-KWC-AUSLAUF
ATT-KWC-STROMVERSORGUNG
ATT-KWC-FARBCODE
Installation_type
Faucet_typ
Measure_Height
G_Acoustic group
Projection_A
EnergyLabelCH
Connection measure
ATT-KWC-MASS-WASSERAUSTRITT
Materiál

6 l/min (3 bar)
berührungsloser_Thermostat
fixovaná
Baterie
chromeline
montáž na stěnu
Elektronik
60
I
A200
B
153
70
mosaz

