


KWC SHOWERCULTURE  
Thermostatic mixer - Shower system

Modell-Linie: **SHOWERCULTURE** | 26.006.313.000  
Showers | Shower Systems

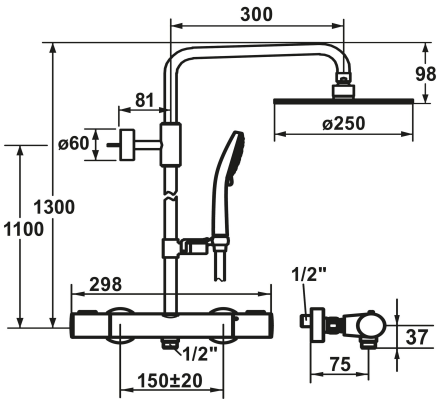

KWC-No.

**125276**  
chromeline, AD 150 +/- 20 mm, A 300, with hand shower and hose

- \* Shower system fit
- \* The water-bearing sliding wall bar can be shortened to any individual length as required
- \* Swiveling bracket, shower head with ball joint
- \* SkinProtect - Safety stop prevents scalding
- \* Turning handle to control flow and for diverter
- \* KWC ball joint bracket, elevation adjustment lockable
- \* Tube diameter 20 mm
- \* Intrinsically safe against backflow
- \* Easy to install on existing connections
- \* Thermostatic precision control unit
- constant water temperature (even when mains pressure

- fluctuates)
- fast response
- \* Wall connections 1/2" x 3/4", without shut-off valve eccentric 10 mm
- \* Scope of delivery:
- Thermostat incl. wall connections with outlet (top) for water-bearing sliding wall bar
- Hand shower KWC FIT -E trio 26.000.132.000
- Shower hose 1600 mm, plastic 26.001.003.000
- Shower head KWC PIATTO -X R250 26.000.214.000
- Sliding wall bar kit 26.004.003.000
- Shower guide rod holder (top), for connecting guide rod and spray arm

Technical Data

Flow rate
Spray outlet: Flow rate
Shower_set
Color_code
Installation_type
Faucet_typ
Dimension Height
G_Acoustic group
Spray outlet: Acoustic group
Projection_A
Connection measure
material

17.8 l/min (3 bar)
11.3 l/min (3 bar)
with shower head, hose
chrome
Wall mounted
Thermostatic
1300
I
I
A 300
150+/- 20
Brass

