**KWC** IQUA
Automatic, non-contact - Basin

**Modell-Linie: IQUA | 12.696.171.000**
Umyvadlové armatury | Samouzavírací armatury

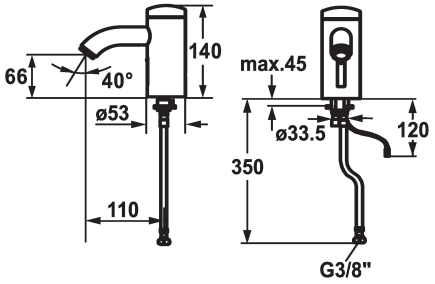


| KWC-No. | ATT-KWC-STROMVERSORGUNG |
|---|---|
| **125277**<br>chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, without mixing | Baterie |
| **125278**<br>chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, without mixing | Netz AP |

* Automatic controled style
* Infrared sensor L20
* Without mixing
- for cold or mixed water supply
* EcoProtect - water-saving device
* Basic: counter-sunk iqua-click
* Microprocessor-control
- flow time adjustable (1 second factory setting)
- short time off (cleaning) activatable
- continuous water flow (filling) activatable
- sensor sensitivity adjustable permanent, automatic self-calibration
- 12- or 24-hour-hygiene flushing activatable

* Fixed spout
- Neoperl® Cascade®
* Electrovalve
* Flexible connection hose ⅜"
* Fastening by means of stud bolt M8 x 1
* Mounting hole size ø35 mm
* Scope of delivery:
- Battery 6 V Lithium CRP2
- lifespan at 100 circuits/day: 4 years
3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

**Technické údaje**

| | |
|---|---|
| A_Spout_Spray | 6 l/min (3 bar) |
| ATT-KWC-ABLAUFGARNITUR | ohne_Ablaufgarnitur |
| ATT-KWC-EL_STEUERUNG | berührungslos |
| Connection | Flexibler_Anschlussschlauch |
| ATT-KWC-AUSLAUF | fixovaná |
| ATT-KWC-IQUA_CLICK | Basic, ohne Mischung |
| ATT-KWC-STROMVERSORGUNG | Baterie |
| ATT-KWC-FARBCODE | chromeline |
| Installation_type | Standmontage |
| Faucet_typ | Elektronik |
| Measure_Height | 140 |
| G_Acoustic group | I |
| Projection_A | A110 |
| EnergyLabelCH | A |
| ATT-KWC-MASS-WASSERAUSTRITT | 66 |
| Materiál | mosaz |