KWC IQUA
Automatic, non-contact - Basin

Modell-Linie: IQUA | 12.696.171.000
Kranar | Samouzavírací armatury

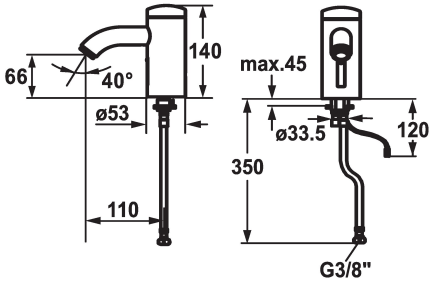

KWC-No.	ATT-KWC-STROMVERSORGUNG
125277 chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, without mixing	Batteri
125278 chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, without mixing	Netz AP

* Automatic controled style
* Infrared sensor L20
* Without mixing
- for cold or mixed water supply
* EcoProtect - water-saving device
* Basic: counter-sunk iqua-click
* Microprocessor-control
- flow time adjustable (1 second factory setting)
- short time off (cleaning) activatable
- continuous water flow (filling) activatable
- sensor sensitivity adjustable permanent, automatic self-calibration
- 12- or 24-hour-hygiene flushing activatable

* Fixed spout
- Neoperl® Cascade®
* Electrovalve
* Flexible connection hose ⅜"
* Fastening by means of stud bolt M8 x 1
* Mounting hole size ø35 mm
* Scope of delivery:
- Battery 6 V Lithium CRP2
- lifespan at 100 circuits/day: 4 years
3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

Technical Data

A_Spout_Spray	6 l/min (3 bar)
ATT-KWC-ABLAUFGARNITUR	ohne_Ablaufgarnitur
ATT-KWC-EL_STEUERUNG	berührungslos
Connection	Flexibler_Anschlussschlauch
ATT-KWC-AUSLAUF	fest
ATT-KWC-IQUA_CLICK	Basic, ohne Mischung
ATT-KWC-STROMVERSORGUNG	Batteri
ATT-KWC-FARBCODE	chromeline
Installation_type	Standmontage
Faucet_typ	Elektronik
Measure_Height	140
G_Acoustic group	I
Projection_A	A110
EnergyLabelCH	A
ATT-KWC-MASS-WASSERAUSTRITT	66
Material	Mässing