


KWC IQUA
Automatic, non-contact - Basin

Modell-Linie: IQUA | 12.696.181.000
Kranar | Samouzavírací armatury

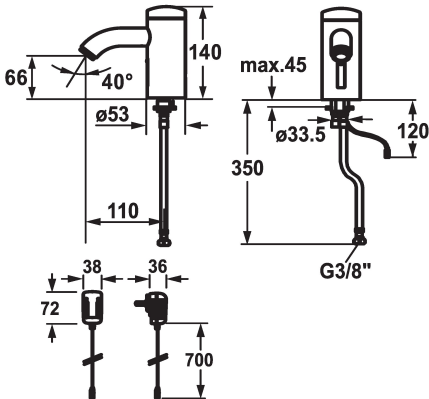

KWC-No.

- 125277**
chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, without mixing
- 125278**
chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, without mixing

- * Automatic controled style
- * Infrared sensor L20
- * Without mixing
- for cold or mixed water supply
- * EcoProtect - water-saving device
- * Basic: counter-sunk iqua-click
- * Microprocessor-control
- flow time adjustable (1 second factory setting)
- short time off (cleaning) activatable
- continuous water flow (filling) activatable
- sensor sensitivity adjustable permanent, automatic self-calibration

Technical Data

A_Spout_Spray
ATT-KWC-ABLAUFGARNITUR
ATT-KWC-EL_STEUERUNG
Connection
ATT-KWC-AUSLAUF
ATT-KWC-IQUA_CLICK
ATT-KWC-STROMVERSORGUNG
ATT-KWC-FARBCODE
Installation_type
Faucet_typ
Measure_Height
G_Acoustic group
Projection_A
EnergyLabelCH
ATT-KWC-MASS-WASSERAUSTRITT
Material

ATT-KWC-STROMVERSORGUNG

- Batteri
- Netz AP
- 12- or 24-hour-hygiene flushing activatable
 - * Fixed spout
 - Neoperl® Cascade®
 - * Electrovalve
 - * Flexible connection hose 3/8"
 - * Fastening by means of stud bolt M8 x 1
 - * Mounting hole size $\varnothing 35$ mm
 - * Scope of delivery:
 - Mains receiver 100-240 V / operating voltage 6 V
 - 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

6 l/min (3 bar)
ohne_Ablaufgarnitur
berührungslos
Flexibler_Anschluss Schlauch
fest
Basic, ohne Mischung
Netz AP
chromeline
Standmontage
Elektronik
140
I
A110
A
66
Mässing

