


KWC IQUA

Automatic, non-contact - Basin

Modell-Linie: IQUA | 12.696.081.000

Taps | Self closing taps

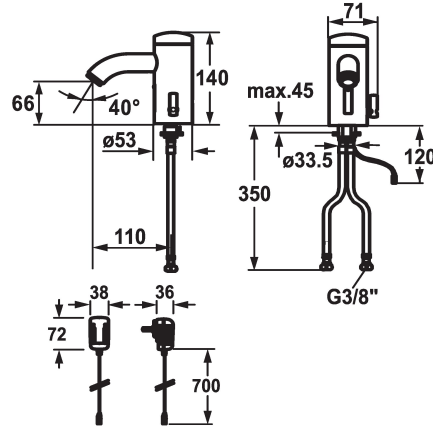

KWC-No.

125279

chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, with mixing

125280

chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, with mixing

- * Automatic controled style
- * Infrared sensor L10
- * With mixing
 - temperature limiter adjustable
- * EcoProtect - water-saving device
- * Basic: counter-sunk iqua-click
- * Microprocessor-control
 - flow time adjustable (1 second factory setting)
 - short time off (cleaning) activatable
 - continuous water flow (filling) activatable
 - sensor sensitivity adjustable permanent, automatic self-calibration
 - 12- or 24-hour-hygiene flushing activatable

Power_supply

battery

mains receiver

- * Fixed spout
 - Neoperl® Cascade®
- * Electrovalve
- * Flexible connection hoses 3/8"
- * Fastening by means of stud bolt M8 x 1
- * Mounting hole size ø35 mm
- * Scope of delivery:
 - Battery 6 V Lithium CRP2
 - lifespan at 100 circuits/day: 4 years
- 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

Technical Data

Flow rate
Pop-up_valve
Electronical_control
Connection
Spout
IQUA_Click
Power_supply
Color code
Installation_type
Faucet_typ
Dimension Height
G_Acoustic group
Projection_A
Energy Label
Dimension Water outlet
material

6 l/min (3 bar)
without pop-up valve
Automatic, non-contact
Flexible connection hose
fixed
Basic, with mixing
battery
chrome
Pillar installation
Electronic
140
I
A 110
A
66
Brass

