


KWC IQUA  
Automatic, non-contact - Basin

Modell-Linie: IQUA | 12.696.081.000  
Kranar | Samouzavírací armatury

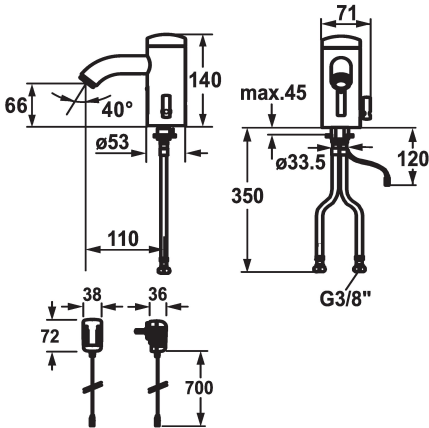

KWC-No.

- 125279**  
chromeline, A 115, flexible connection hose, without pop-up valve, battery, Basic, with mixing
- 125280**  
chromeline, A 115, flexible connection hose, without pop-up valve, mains receiver, Basic, with mixing

- \* Automatic controled style
- \* Infrared sensor L10
- \* With mixing
  - temperature limiter adjustable
- \* EcoProtect - water-saving device
- \* Basic: counter-sunk iqua-click
- \* Microprocessor-control
  - flow time adjustable (1 second factory setting)
  - short time off (cleaning) activatable
  - continuous water flow (filling) activatable
  - sensor sensitivity adjustable permanent, automatic self-calibration
  - 12- or 24-hour-hygiene flushing activatable

Technical Data

|                             |
|-----------------------------|
| A_Spout_Spray               |
| ATT-KWC-ABLAUFGARNITUR      |
| ATT-KWC-EL_STEUERUNG        |
| Connection                  |
| ATT-KWC-AUSLAUF             |
| ATT-KWC-IQUA_CLICK          |
| ATT-KWC-STROMVERSORGUNG     |
| ATT-KWC-FARBCODE            |
| Installation_type           |
| Faucet_typ                  |
| Measure_Height              |
| G_Acoustic group            |
| Projection_A                |
| EnergyLabelCH               |
| ATT-KWC-MASS-WASSERAUSTRITT |
| Material                    |

ATT-KWC-STROMVERSORGUNG

- Batteri
- Netz AP

- \* Fixed spout
  - Neoperl® Cascade®
- \* Electrovalve
- \* Flexible connection hoses 3/8"
- \* Fastening by means of stud bolt M8 x 1
- \* Mounting hole size ø35 mm
- \* Scope of delivery:
  - Battery 6 V Lithium CRP2
  - lifespan at 100 circuits/day: 4 years
- 3 Avoid using infrared controls near highly reflective surfaces (e.g. mirrors, polished stainless steel basins) as this could cause them to activate accidentally or malfunction.

|                              |
|------------------------------|
| 6 l/min (3 bar)              |
| ohne_Ablaufgarnitur          |
| berührungslos                |
| Flexibler_Anschluss Schlauch |
| fest                         |
| Basic, mit Mischung          |
| Batteri                      |
| chromeline                   |
| Standmontage                 |
| Elektronik                   |
| 140                          |
| I                            |
| A110                         |
| A                            |
| 66                           |
| Mässing                      |

