


KWC BISTRO E Lever mixer – Kitchen

Modell-Linie: BISTRO E | 10.581.013.700FL
Umyvadlové armatury | Hydraulické armatury

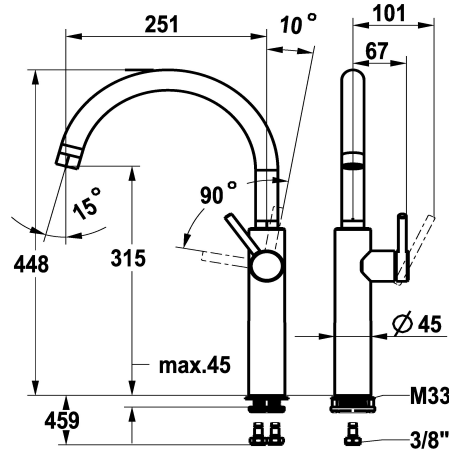

KWC-No.

125692
stainless steel, A 250, flexible connection hoses

- * Lever mixer
- * Lever installation only possible on the right side
- Child safety: cold water flow in lever position towards the front
- * Swivel spout 360°
- Neoperl® Caché® laminar
- * OptimalSpace - ample space for washing or working
- * KWC cartridge M 35 S

- with ceramic discs
- flow rate and temperature continuously variable
- * Flexible connection hoses 3/8"
- * QuickInstallation - Fastening via threaded connection with locking screws
- * Mounting hole size ø35 mm

NEW

Technické údaje

A_Spout_Spray
Connection
ATT-KWC-AUSLAUF
Handling
ATT-KWC-FARBCODE
Installation_type
Faucet_typ
ATT-KWC-BAUFORM
Measure_Height
G_Acoustic_group
Projection_A
EnergyLabelCH
ATT-KWC-MASS-WASSERAUSTRITT
Materiál

14 l/min (3 bar)
Flexible_Anschlusschläuche
schwenkbar
seitenbedient
stainless steel
Standmontage
Hebelmischer
J-Auslauf
448
II
A250
C
315
ROSTFREIER_STAHL



Náhradní díly

KWC BISTRO E Lever mixer – Kitchen

Modell-Linie: BISTRO E | 10.581.013.700FL
Umyvadlové armatury | Hydraulické armatury



Service key Neoperl © Caché ©, STD,
24 mm, grey

635231
Z.635.231
