


KWC BISTRO E Lever mixer – Kitchen

Modell-Linie: BISTRO E | 10.581.013.700FL
Taps | Manual taps

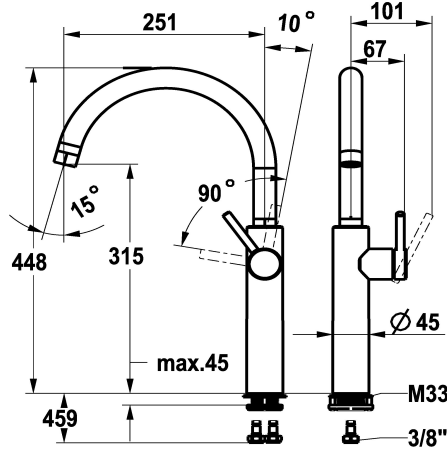

KWC-No.

125692

stainless steel, A 250, flexible connection hoses

- * Lever mixer
- * Lever installation only possible on the right side
- Child safety: cold water flow in lever position towards the front
- * Swivel spout 360°
- Neoperl® Caché® laminar
- * OptimalSpace - ample space for washing or working
- * KWC cartridge M 35 S

- with ceramic discs
- flow rate and temperature continuously variable
- * Flexible connection hoses 3/8"
- * QuickInstallation - Fastening via threaded connection with locking screws
- * Mounting hole size ø35 mm

NEW

Technical Data

Flow rate	14 l/min (3 bar)
Connection	Flexible connection hoses
Spout	swivel
Handling	side lever
Color_code	stainless steel
Installation_type	Pillar installation
Faucet_typ	Lever mixer
Design	J-Spout
Dimension Height	448
G_Acoustic_group	II
Projection_A	A 250
Energy Label	C
Dimension Water outlet	315
material	stainless steel

Flow rate	14 l/min (3 bar)
Connection	Flexible connection hoses
Spout	swivel
Handling	side lever
Color_code	stainless steel
Installation_type	Pillar installation
Faucet_typ	Lever mixer
Design	J-Spout
Dimension Height	448
G_Acoustic_group	II
Projection_A	A 250
Energy Label	C
Dimension Water outlet	315
material	stainless steel



Spare Parts

KWC BISTRO E
Lever mixer – Kitchen

Modell-Linie: **BISTRO E | 10.581.013.700FL**
Taps | Manual taps



Service key Neoperl © Caché ©, STD,
24 mm, grey

635231
Z.635.231
