KWC ONO E
Automatic faucet, non-contact - basin

Modell-Linie: ONO E | 12.576.022.700FL
Taps | Electronic taps

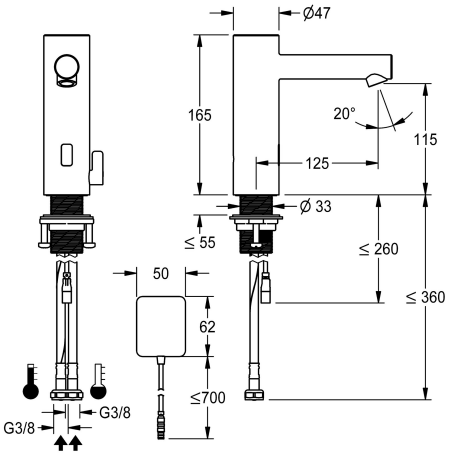

KWC-No.

3600001584
stainless steel, A 125, flexible connection hose, without pop-up valve, power supply unit, with mixing

* Automatic, non-contact, basin
- opto-electronic controlled
* Made of stainless steel
* With mixing
- adjustable, twist-proof temperature stop
* EfficientFlow - integrated flow control
* Control electronics
- 24-hour hygiene flushing adjustable
- Safety shutdown in case of continuous reflection
- Storage of statistical data
* Fixed spout
- Neoperl® Perlator® SSR, swivelling jet regulator
* Electrovalve
* Flexible connection hose 3/8"
* QuickInstallation - Fastening via threaded connection M33 x 1.5 with locking screws
* Mounting hole size ø35 mm
* Scope of delivery:
- Mains receiver 100-240 V AC - 6.75 V DC
* Order separately (optional or if required):
- Possibility of parameterization via bidirectional remote control, or C-module Z.540.137 with an app

Technical Data

Connection	Flexible connection hose ⅜"
Spout	Fixed
Power supply	mains receiver
Color code	stainless steel
Installation_type	Pillar installation
Article type	Electronics
Projection A	125 mm
Maximum height	165 mm
Handling	Contactless via sensor
Acoustic group	I
Energy Label (CH)	A
Flow rate	4.8 l/min (3 bar)