


## KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.022.700FL

Hanat | Elektroniset hanat

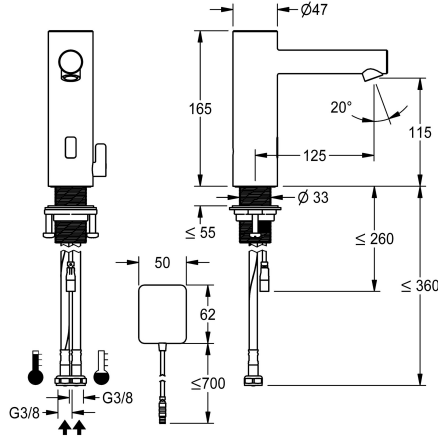

### KWC-No.

**3600001584**

stainless steel, A 125, flexible connection hoses, without drain fitting, surface-mounted power supply unit, with mixing

- \* Automatic, non-contact, basin
- opto-electronic controlled
- \* Made of stainless steel
- \* With mixing
- adjustable, twist-proof temperature stop
- \* EcoProtect - water-saving device
- \* Control electronics
- 24-hour hygiene flushing adjustable
- Safety shutdown in case of continuous reflection
- Storage of statistical data
- \* Fixed spout

- Neoperl® Perlator® SSR, swivelling jet regulator
- \* Electrovalve
- \* Flexible connection hoses 3/8"
- \* QuickInstallation - Fastening via threaded connection M33 x 1.5 with locking screws
- \* Mounting hole size ø35 mm
- \* Scope of delivery:
- Mains receiver 100-240 V AC - 6.75 V DC
- \* Order separately (optional or if required):
- Possibility of parameterization via bidirectional remote control, or C-module (3600001331) with an app

**NEW**

### Tekniset tiedot

A_Spout_Spray
ATT-KWC-EL_STEUERUNG
Connection
Spout
ATT-KWC-STROMVERSORGUNG
ATT-KWC-FARBCODE
Installation_type
Faucet_typ
Measure_Height
G_Acoustic group
Projection_A
EnergyLabelCH
lviCode

4.8 l/min (3 bar)
berührungslös
04
Kiinnitetty
Netz AP
stainless steel
Standmontage
Elektronik
165
l
A125
A
0



### Valinnaiset lisävarusteet

## KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.022.700FL

Hanot | Elektroniset hanat



### Kaksisuuntainen kaukosäädin

**2030036654**  
ACEX9005

### 2-painikkeinen kaukosäädin

**2030036849**  
ACEX9004

### C-moduuli

**3600001331**  
ACEX9020