


KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.022.700FL

Kranar | Elektronické armatury

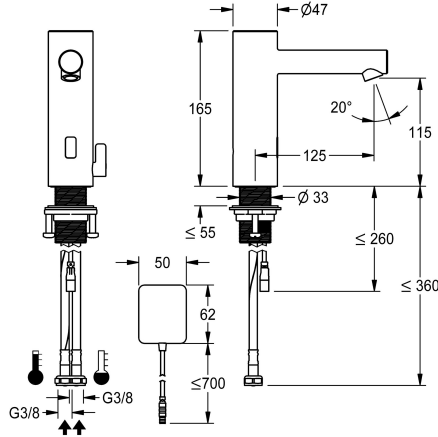

KWC-No.

3600001584

stainless steel, A 125, flexible connection hoses, without drain fitting, surface-mounted power supply unit, with mixing

- * Automatic, non-contact, basin
- opto-electronic controlled
- * Made of stainless steel
- * With mixing
- adjustable, twist-proof temperature stop
- * EcoProtect - water-saving device
- * Control electronics
- 24-hour hygiene flushing adjustable
- Safety shutdown in case of continuous reflection
- Storage of statistical data
- * Fixed spout

- Neoperl® Perlator® SSR, swivelling jet regulator
- * Electrovalve
- * Flexible connection hoses 3/8"
- * QuickInstallation - Fastening via threaded connection M33 x 1.5 with locking screws
- * Mounting hole size ø35 mm
- * Scope of delivery:
 - Mains receiver 100-240 V AC - 6.75 V DC
 - * Order separately (optional or if required):
 - Possibility of parameterization via bidirectional remote control, or C-module (3600001331) with an app



Technical Data

| |
|-------------------------|
| ATT-KWC-EL_STEUERUNG |
| Connection |
| ATT-KWC-AUSLAUF |
| ATT-KWC-STROMVERSORGUNG |
| ATT-KWC-FARBCODE |
| Installation_type |
| Faucet_typ |
| Measure_Height |
| Projection_A |

| |
|-----------------|
| berührungslos |
| 04 |
| fest |
| Netz AP |
| stainless steel |
| Standmontage |
| Elektronik |
| 165 |
| A125 |



Extratillbehör





KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.022.700FL

Kranar | Elektronické armatury

**Bidirectional remote control for
electronical fittings F3 and F5**

2030036654
ACEX9005

**2-button remote control for fittings F3
and F5**

2030036849
ACEX9004

C module

3600001331
ACEX9020
