


## KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.023.700FL

Taps | Electronic taps

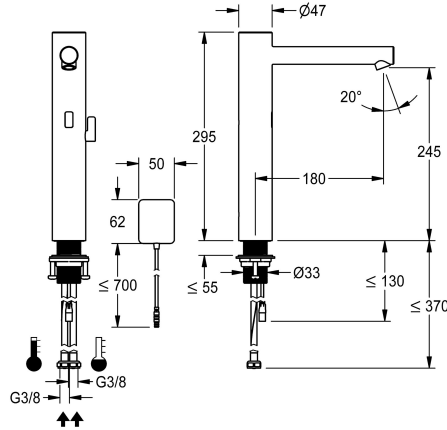

### KWC-No.

**360001588**

stainless steel, A 180, flexible connection hoses, without drain fitting, surface-mounted power supply unit, with mixing

- \* Automatic, non-contact, basin
- opto-electronic controlled
- \* For top-mounted basins
- \* Made of stainless steel
- \* With mixing
- adjustable, twist-proof temperature stop
- \* EcoProtect - water-saving device
- \* Control electronics
- 24-hour hygiene flushing adjustable
- Safety shutdown in case of continuous reflection
- Storage of statistical data
- \* Fixed spout

- Neoperl® Perlator® SSR, swivelling jet regulator
- \* Electrovalve
- \* Flexible connection hoses 3/8"
- \* QuickInstallation - Fastening via threaded connection M33 x 1.5 with locking screws
- \* Mounting hole size ø35 mm
- \* Scope of delivery:
  - Mains receiver 100-240 V AC - 6.75 V DC
- \* Order separately (optional or if required):
  - Possibility of parameterization via bidirectional remote control, or C-module Z.540.137 with an app



### Technical Data

Flow rate
Electronical_control
Connection
Spout
Power_supply
Color_code
Installation_type
Faucet_typ
Dimension Height
G_Acoustic group
Projection_A
Energy Label

4.8 l/min (3 bar)
Automatic, non-contact
Spare parts 1
fixed
mains receiver
stainless steel
for top-mounted sinks
Electronic
295
I
A 180
A



### Optional Accessories

## KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.023.700FL  
Taps | Electronic taps



**Bidirectional remote control for  
electronical fittings F3 and F5**

---

**2030036654**  
ACEX9005

---



**2-button remote control for fittings F3  
and F5**

---

**2030036849**  
ACEX9004

---



**C module**

---

**3600001331**  
ACEX9020

---