


KWC ORA Lever mixer - basin

Modell-Linie: ORA | 12.498.641.179FL
Taps | Manual taps

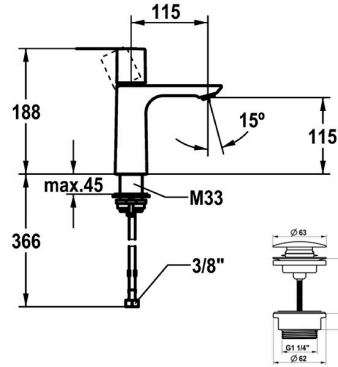

KWC-No.

125484 chromeline, A 115, flexible connection hoses 3/8", with Push Open
125485 chromeline, A 115, flexible connection hoses 3/8", without pop-up valve
3600016846 brushed gold, A 115, flexible connection hoses 3/8", with Push Open
3600016914 brushed gold, A 115, flexible connection hoses 3/8", without pop-up valve
3600016847 matt black, A 115, flexible connection hoses 3/8", with Push Open
3600016917 matt black, A 115, flexible connection hoses 3/8", without pop-up valve
3600016814 brushed steel, A 115, flexible connection hoses 3/8", with Push Open
3600016919 brushed steel, A 115, flexible connection hoses 3/8", without pop-up valve
3600016848 brushed copper, A 115, flexible connection hoses 3/8", with Push Open
3600016930 brushed copper, A 115, flexible connection hoses 3/8", without pop-up valve
3600016815 brushed graphite, A 115, flexible connection hoses 3/8", with Push Open
3600016940 brushed graphite, A 115, flexible connection hoses 3/8", without pop-up valve

Pop-up_valve

MIT_PUSH_OPEN
OHNE_ABLAUFGARNITUR
MIT_PUSH_OPEN
OHNE_ABLAUFGARNITUR
MIT_PUSH_OPEN
OHNE_ABLAUFGARNITUR
MIT_PUSH_OPEN
OHNE_ABLAUFGARNITUR
MIT_PUSH_OPEN
OHNE_ABLAUFGARNITUR
MIT_PUSH_OPEN
OHNE_ABLAUFGARNITUR

Color_code

chromeline
chromeline
brushed gold
brushed gold
matt black
matt black
brushed steel
brushed steel
brushed copper
brushed copper
brushed graphite
brushed graphite

NEW

- * Lever mixer
- * EcoProtect - water-saving device
- * Fixed spout
- Neoperl® Perlator® SSR, swivelling jet regulator
- * KWC cartridge M 35 OP
- with ceramic discs
- flow rate and temperature continuously variable

- * Flexible connection hoses 3/8"
- * QuickInstallation - Fastening via threaded connection with locking screws
- * Mounting hole size ø35 mm
- * Scope of delivery:
- KWC pop-up valve Push Open 2 in 1 Z.540.049.779

Technical Data

A_Spout_Spray

4 l/min (3 bar)

KWC ORA Lever mixer - basin

Modell-Linie: ORA | 12.498.641.179FL
Taps | Manual taps

Pop-up_valve	MIT_PUSH_OPEN
Connection	FLEXIBLE_ANSCHLUSSSCHL_3/8"
Spout	fixe
Handling	top lever
Color_code	brushed graphite
Installation_type	Pillar installation
Article type	Lever mixer
Measure_Height	188
G_Acoustic_group	I
Projection_A	A 115
Energy Label (CH)	A
material	Brass



Spare Parts



Control cartridge

538331
Z.537.710



Service key Neoperl © Caché ©, JR, 21 mm, red

639017
Z.635.215