


KWC ORA Lever mixer - basin

Modell-Linie: ORA | 12.498.641.178FL
Taps | Manual taps

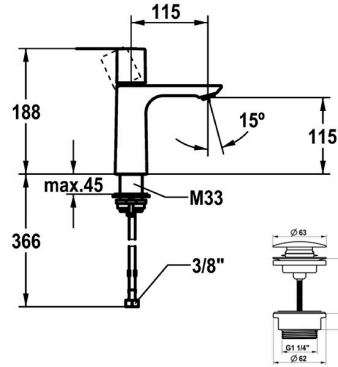

KWC-No.

125484 chromeline, A 115, flexible connection hoses 3/8", with Push Open
125485 chromeline, A 115, flexible connection hoses 3/8", without pop-up valve
3600016846 brushed gold, A 115, flexible connection hoses 3/8", with Push Open
3600016914 brushed gold, A 115, flexible connection hoses 3/8", without pop-up valve
3600016847 matt black, A 115, flexible connection hoses 3/8", with Push Open
3600016917 matt black, A 115, flexible connection hoses 3/8", without pop-up valve
3600016814 brushed steel, A 115, flexible connection hoses 3/8", with Push Open
3600016919 brushed steel, A 115, flexible connection hoses 3/8", without pop-up valve
3600016848 brushed copper, A 115, flexible connection hoses 3/8", with Push Open
3600016930 brushed copper, A 115, flexible connection hoses 3/8", without pop-up valve
3600016815 brushed graphite, A 115, flexible connection hoses 3/8", with Push Open
3600016940 brushed graphite, A 115, flexible connection hoses 3/8", without pop-up valve

- * Lever mixer
- * EcoProtect - water-saving device
- * Fixed spout
- Neoperl® Perlator® SSR, swivelling jet regulator
- * KWC cartridge M 35 OP
- with ceramic discs
- flow rate and temperature continuously variable

Ablaufgarnitur

mit Push Open
ohne Ablaufventil
mit Push Open
ohne Ablaufventil
mit Push Open
ohne Ablaufventil
mit Push Open
ohne Ablaufventil
mit Push Open
ohne Ablaufventil
mit Push Open
ohne Ablaufventil

Farbcode

chromeline
chromeline
brushed gold
brushed gold
matt black
matt black
brushed steel
brushed steel
brushed copper
brushed copper
brushed graphite
brushed graphite

NEW

- * Flexible connection hoses 3/8"
- * QuickInstallation - Fastening via threaded connection with locking screws
- * Mounting hole size 35 mm
- * Scope of delivery:
- KWC pop-up valve Push Open 2 in 1 Z.540.049.778

Technical Data

Auslaufmenge

4 l/min (3 bar)

KWC ORA Lever mixer - basin

Modell-Linie: ORA | 12.498.641.178FL
Taps | Manual taps

Ablaufgarnitur	mit Push Open
Anschluss	Flexible Anschlussschläuche 3/8"
Auslauf	fest
Bedienung	topbedient
Farbcode	brushed copper
Installationsart	Standmontage
Artikeltyp	Hebelmischer
Mass Höhe	188
Armaturengeräuschgruppe	I
Ausladung A	A 115
Energieetikette (CH)	A
Material	Messing



Spare Parts



Control cartridge

538331
Z.537.710



Service key Neoperl © Caché ©, JR, 21 mm, red

639017
Z.635.215