


KWC GASTRO Lever mixer - Commercial kitchen

Modell-Linie: GASTRO | 24.501.144.000
Taps | Manual taps

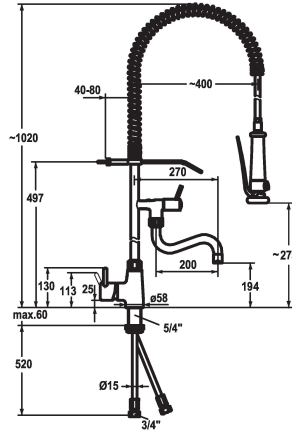

KWC-No.

121275
chromeline, A 200, B 270, Kupferrohranschlüsse

121276
chromeline, A 300, B 370

- * Lever mixer
- * Suspension spring
- * TouchProtect - anti-scald protection thanks to the "double skin" principle
- * Intrinsicly safe against backflow
- * Swivel spout
 - with adjustable gland
 - Jet regulator
- * Pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning and swivelling sieve jet
 - SprayClean - easy to clean and actively prevents limescale

Projection A

A 200 / A 400

A 300 / A 400

- buildup
 - SprayLock - lockable jet spray
 - PowerClean - needle spray mode
- * OptimalSpace - ample space for washing or working
- * KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- * Copper tubes ø15 mm
- * Fastening by means of threaded sleeve 1 1/4"
- * Mounting hole size ø42 mm

Technical Data

| |
|------------------------------|
| Flow rate |
| Spray: Flow rate |
| Connection |
| Spout |
| Wall bracket |
| Handling |
| Kitchenspray |
| Projection B |
| Color code |
| Installation type |
| Faucet_typ |
| Measure Height |
| Acoustic group |
| Spray outlet: Acoustic group |
| Projection A |
| Dimension Water outlet |
| material |

| |
|---------------------|
| 32 l/min (3 bar) |
| 15 l/min (3 bar) |
| Copper tubes |
| fixed |
| with wall bracket |
| side lever |
| Pre-rinse spray |
| B 270 |
| chromeline |
| Pillar installation |
| Lever mixer |
| 1020 |
| II |
| I |
| A 200 / A 400 |
| 194/275 |
| Brass |

