
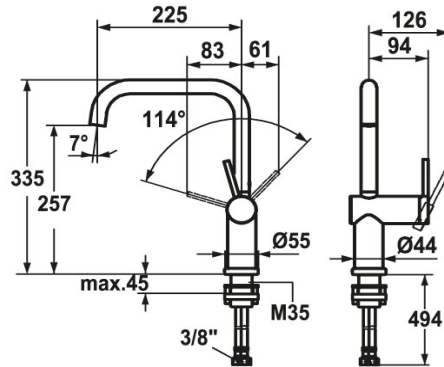


KWC LIVELLO

Lever mixer - Kitchen - detachable

Modell-Linie: LIVELLO | 10.231.043.700FL

Taps | Manual taps

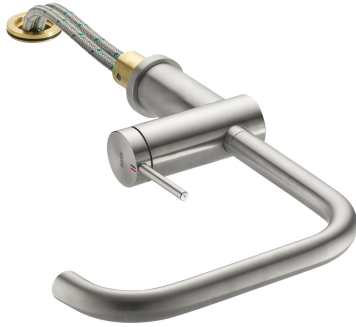

KWC-No.

123115

stainless steel, A 225, flexible connection hoses

- * Lever mixer
- * Detachable for installation below windows - detached 55 mm
- * Lever installation only possible on the right side
- Child safety: cold water flow in lever position towards the front
- * gap between wall and centre of mounting hole min. 65 mm
- * Intrinsically safe against backflow
- * Swivel spout 125°, extensible to 360°
- Neoperl® Caché®

- * OptimalSpace - ample space for washing or working
- * KWC cartridge M 35 H
- with ceramic discs
- flow rate and temperature continuously variable
- * Flexible connection hoses 3/8"
- * Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- * Mounting hole size ø35 - 37 mm

Technical Data

Flow rate	12 l/min (3 bar)
Connection	Flexible connection hoses
Spout	swivel
Detachable	detachable
Handling	side lever
Color code	stainless steel
Installation type	Pillar installation
Faucet_typ	Lever mixer
Design	L-Spout
Dimension Height	335
Acoustic group	II
Projection A	A 225
Energy label	C
Dimension Water outlet	257
material	stainless steel



Spare Parts

KWC LIVELLO

Lever mixer - Kitchen - detachable

Modell-Linie: LIVELLO | 10.231.043.700FL
Taps | Manual taps



Cartridge M 35 H

538327
Z.537.582



Service key Neoperl © Caché ©, JR, 21 mm, red

639017
Z.635.215