


KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.122.700FL

Taps | Electronic taps

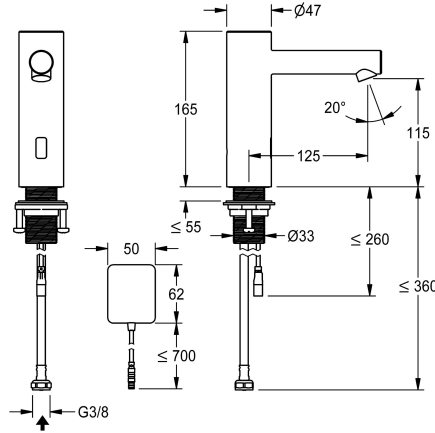

KWC-No.

360001582

stainless steel, A 125, flexible connection hose, without drain fitting, surface-mounted power supply unit, without mixing

- * Automatic, non-contact, basin
- opto-electronic controlled
- * Made of stainless steel
- * Without mixing
- for cold or mixed water supply
- * EcoProtect - water-saving device
- * Control electronics
- 24-hour hygiene flushing adjustable
- Safety shutdown in case of continuous reflection
- Storage of statistical data
- * Fixed spout

- Neoperl® Perlator® SSR, swivelling jet regulator
- * Electrovalve
- * Flexible connection hose 3/8"
- * QuickInstallation - Fastening via threaded connection M33 x 1.5 with locking screws
- * Mounting hole size ø35 mm
- * Scope of delivery:
- Mains receiver 100-240 V AC - 6.75 V DC
- * Order separately (optional or if required):
- Possibility of parameterization via bidirectional remote control, or C-module Z.540.137 with an app

NEW

Technical Data

Flow rate
Electronical_control
Connection
Spout
Power_supply
Color_code
Installation_type
Faucet_typ
G_Acoustic group
Projection_A
Energy Label

4.8 l/min (3 bar)
Automatic, non-contact
Pressure Balance1
fixed
mains receiver
stainless steel
Pillar installation
Electronic
I
A 125
A



Optional Accessories

KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.122.700FL
Taps | Electronic taps



**Bidirectional remote control for
electronical fittings F3 and F5**

2030036654
ACEX9005



**2-button remote control for fittings F3
and F5**

2030036849
ACEX9004



C module

3600001331
ACEX9020
