


KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.123.700FL

Taps | Electronic taps

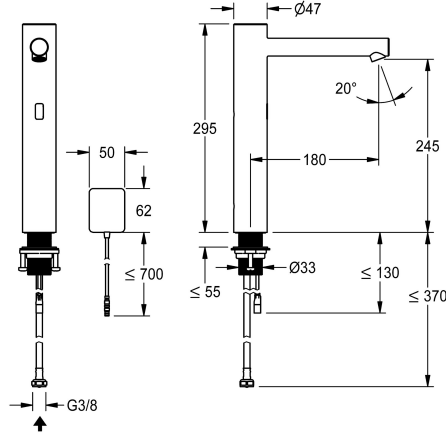

KWC-No.

360001586

stainless steel, A 180, flexible connection hose, without drain fitting, surface-mounted power supply unit, without mixing

- * Automatic, non-contact, basin
- opto-electronic controlled
- * For top-mounted basins
- * Made of stainless steel
- * Without mixing
- for cold or mixed water supply
- * EcoProtect - water-saving device
- * Control electronics
- 24-hour hygiene flushing adjustable
- Safety shutdown in case of continuous reflection
- Storage of statistical data
- * Fixed spout

- Neoperl® Perlator® SSR, swivelling jet regulator
- * Electrovalve
- * Flexible connection hose 3/8"
- * QuickInstallation - Fastening via threaded connection M33 x 1.5 with locking screws
- * Mounting hole size ø35 mm
- * Scope of delivery:
 - Mains receiver 100-240 V AC - 6.75 V DC
- * Order separately (optional or if required):
 - Possibility of parameterization via bidirectional remote control, or C-module Z.540.137 with an app



Technical Data

Flow rate
Electronical control
Connection
Spout
Power supply
Color code
Installation type
Faucet_typ
Dimension Height
Acoustic group
Projection A
Energy label

4.8 l/min (3 bar)
Automatic, non-contact
Pressure Balance1
fixed
mains receiver
stainless steel
for top-mounted sinks
Electronic
295
I
A 180
A



Optional Accessories

KWC ONO E

Automatic tap, touchless – Washbasin

Modell-Linie: ONO E | 12.576.123.700FL
Taps | Electronic taps



**Bidirectional remote control for
electronical fittings F3 and F5**

2030036654
ACEX9005



**2-button remote control for fittings F3
and F5**

2030036849
ACEX9004



C module

3600001331
ACEX9020
